

FORM PTO-1590 (Modified)  
(REV 11-2000)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

## TRANSMITTAL LETTER TO THE UNITED STATES

214706US2PCT

DESIGNATED/ELECTED OFFICE (DO/EO/US)

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR

CONCERNING A FILING UNDER 35 U.S.C. 371

09/926462

INTERNATIONAL APPLICATION NO.

INTERNATIONAL FILING DATE

PRIORITY DATE CLAIMED

PCT/JP00/01405

8 March 2000

none

TITLE OF INVENTION

COMMUNICATION SERVICE SYSTEM, AND DEDICATED COMMUNICATION TERMINAL USED FOR THE SAME

APPLICANT(S) FOR DO/EO/US

MATSUYAMA Hiroshi

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (24) indicated below.
4. ☐ The US has been elected by the expiration of 19 months from the priority date (Article 31).
5. ☒ A copy of the International Application as filed (35 U.S.C. 371 (c) (2))
  - a. ☐ is attached hereto (required only if not communicated by the International Bureau).
  - b. ☒ has been communicated by the International Bureau.
  - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).
  - a. ☒ is attached hereto.
  - b. ☐ has been previously submitted under 35 U.S.C. 154(d)(4).
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3))
  - a. ☐ are attached hereto (required only if not communicated by the International Bureau).
  - b. ☐ have been communicated by the International Bureau.
  - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
  - d. ☒ have not been made and will not be made.
8. ☐ An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).
10. ☐ An English language translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).
11. ☐ A copy of the International Preliminary Examination Report (PCT/IPEA/409).
12. ☐ A copy of the International Search Report (PCT/ISA/210).

**Items 13 to 20 below concern document(s) or information included:**

13. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
14. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
15. ☐ A **FIRST** preliminary amendment.
16. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
17. ☐ A substitute specification.
18. ☐ A change of power of attorney and/or address letter.
19. ☐ A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825.
20. ☐ A second copy of the published international application under 35 U.S.C. 154(d)(4).
21. ☐ A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).
22. ☐ Certificate of Mailing by Express Mail
23. ☒ Other items or information:

**Request for Consideration of Documents Cited in International Search Report**  
**Drawings (8 Sheets)**

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR

INTERNATIONAL APPLICATION NO.

ATTORNEY'S DOCKET NUMBER

09/926462

PCT/JP00/01405

214706US2PCT

24. The following fees are submitted:

**BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)):**

- ☐ Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO ..... \$1040.00
- ☒ International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO ..... \$890.00
- ☐ International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO ..... \$740.00
- ☐ International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4) ..... \$710.00
- ☐ International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4) ..... \$100.00

**ENTER APPROPRIATE BASIC FEE AMOUNT =**

\$890.00

Surcharge of \$130.00 for furnishing the oath or declaration later than months from the earliest claimed priority date (37 CFR 1.492 (e)).

☐ 20 ☐ 30

\$0.00

**CLAIMS**

NUMBER FILED

NUMBER EXTRA

RATE

Total claims 9 - 20 =

0

x \$18.00

\$0.00

Independent claims 4 - 3 =

1

x \$84.00

\$84.00

Multiple Dependent Claims (check if applicable).

☐

\$0.00

**TOTAL OF ABOVE CALCULATIONS =**

\$974.00

☐ Applicant claims small entity status. See 37 CFR 1.27). The fees indicated above are reduced by 1/2.

\$0.00

**SUBTOTAL =**

\$974.00

Processing fee of \$130.00 for furnishing the English translation later than months from the earliest claimed priority date (37 CFR 1.492 (f)).

☐ 20 ☐ 30

+

\$0.00

**TOTAL NATIONAL FEE =**

\$974.00

Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (check if applicable).

☐

\$0.00

**TOTAL FEES ENCLOSED =**

\$974.00

Amount to be:

refunded \$

charged \$

- a. ☒ A check in the amount of \$974.00 to cover the above fees is enclosed.
- b. ☐ Please charge my Deposit Account No. \_\_\_\_\_ in the amount of \_\_\_\_\_ to cover the above fees. A duplicate copy of this sheet is enclosed.
- c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 15-0030. A duplicate copy of this sheet is enclosed.
- d. ☐ Fees are to be charged to a credit card. **WARNING:** Information on this form may become public. **Credit card information should not be included on this form.** Provide credit card information and authorization on PTO-2038.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

Surinder Sachar  
Registered Attorney No. 34,423



22850

SIGNATURE

Marvin J. Spivak

NAME

24,913

REGISTRATION NUMBER

DATE

Nov. 7 2001

8/PRTS

JC10 Rec'd PCT/PTO 07 NOV 2001

09/926462

# SPECIFICATION

## COMMUNICATION SERVICE SYSTEM, AND DEDICATED COMMUNICATION TERMINAL USED FOR THE SAME

This application is the national phase under 35 U.S.C. § 371 of PCT International Application No. PCT/JP00/01405 which has an International filing date of March 8, 2000, which designated the United States of America and was not published in English.

### Technical Field

The present invention generally relates to a communication service system comprising: switching centers mutually connected with one another through a communication network; and dedicated communication terminals that establish a communication circuit for communicating with the switching center to perform prescribed communication, and also to the dedicated communication terminal used for the communication service system. More particularly, the present invention relates to a communication service system suitably used for mobile communication in which a unique number such as a telephone number and an IP address (Internet protocol address) is attached to each of dedicated communication terminals to distinguish each of

the dedicated communication terminals from the other dedicated communication terminals, thereby enabling voice communication and the like between the dedicated communication terminals based on the distinction established by the attached numbers, and also to the dedicated communication terminal used for the communication service system.

#### Background Art

A mobile communication service system that uses portable phone terminals is a conventional example of a communication service system that attaches an unique number to each of dedicated communication terminals to distinguish each of the dedicated communication terminals from the other dedicated communication terminals, and that is thereby capable of voice communication and data communication between the dedicated communication terminals according to the distinction made by this number.

In recent years, in many countries including Japan, in addition to the voice communication service, various kinds of data communication services, which utilize this mobile communication service system, are becoming commonplace. At the same time, data communication between a World-Wide Web server and a mail server for Internet is also developing. As a result, a portable phone terminal

also tends to become multifunctional and to have advanced functions. In addition, for the purpose of meeting demand for various kinds of such communication media, each mobile communication service provider is planning to extend new services using a wideband communication circuit.

Under the circumstances, if all users of portable phone terminals are to be provided with the same service as has been done conventionally, the load imposed on and the efforts required of the following parties concerned increase dramatically. These are users who utilize the service; mobile communication service companies that require key facilities corresponding to the various kinds of services; and, by extension, various manufacturers that provide the hardware according to specifications of the mobile communication service companies. Therefore, considerable impediments to the development of communication industry may arise.

Moreover, apart from such circumstances, differentiation with the other users enables each user to obtain not only real but also psychological satisfaction.

The present invention was devised to solve the problems described above. An object of the present invention is to obtain a communication service system and a dedicated communication terminal used for the system, which can help promote sounder development of communication

industry, by reducing loads and efforts of the users, the mobile communication service companies, and the manufacturers, and by enabling the users to obtain not only real but also psychological satisfaction, while meeting demand for various kinds of services in recent years.

#### Disclosure of Invention

A communication service system according to one variation of the invention comprises:

- a plurality of switching centers;
- a communication network for connecting the plurality of switching centers with one another; and
- a dedicated communication terminal for establishing a communication circuit for communicating with each of the switching centers;

wherein said communication service system holds accumulated utilization information for each of the dedicated communication terminals, and changes functions, user interfaces, and/or communication services, for each of the dedicated communication terminals, in response to the accumulated utilization information.

If such a communication service system is used, it is possible to extend the functions, to change the user interfaces, and moreover, to change communication speed and quality allocation of the functions, for each of the

dedicated communication terminals, in response to each user's utilization status.

As a result, while meeting various kinds of service demand in recent years, it is possible to reduce loads put on, and efforts exerted by: all kinds of users from beginners to highly sophisticated users; mobile communication service companies; and manufacturers. What is more, the users can obtain not only real but also psychological satisfaction. By extension, an effect of promoting sounder development of communication industry is produced.

By the way, concerning the invention like this, the holding function and the changing function may be implemented on a network side where there are a plurality of switching centers and a communication network; or those functions may be implemented on a dedicated communication terminal side; or the functions may be shared between both sides appropriately.

The invention further discloses a dedicated communication terminal that establishes a communication circuit for communicating with respective switching centers connected with one another through a communication network, and that performs prescribed communication, said dedicated communication terminal comprising:

a storing means for holding accumulated





communication terminal comprising:

a plurality of functional counters for counting accumulated utilization information of each function, and for holding the accumulated utilization information;

a level determining means for calculating a weighted sum of values of the plurality of functional counters, and for determining a utilization level of the dedicated communication terminal according to the sum of the values; and

a changing means for changing functions, user interfaces, and/or communication services in response to said utilization level.

If such a dedicated communication terminal is used, the functional counters are provided for each function, and the utilization level is determined according to the total utilization status. Therefore, in each of the dedicated communication terminals, in response to each user's utilization status, for the purpose of providing easier utilization of functions, which are especially frequently utilized, the following become possible: extension of the functions; a change in resource allocation; a change in user interfaces; and furthermore, changes in service classes including communication speed and quality of the functions.

As a result, while meeting various kinds of



the respective utilization status of various communication services such as voice service, mail service, and data communication service, which are required for basic performance of a mobile terminal, the mobile terminal can be individually evolved and developed as a suitable terminal. As a result, an effect of providing an individual user with an easy-to-use terminal is produced.

The dedicated communication terminal may comprise:

a level storing means for storing a utilization level; and

a level input/output means for reading/writing a utilization level from and to said level storing means.

If such a configuration is used, it is possible to notify a user and a communication service provider of the utilization level by means of voice, music, and display when the level is changed. Moreover, it is also possible to download software in relation to a newly available additional function, communication speed, or the like, in response to the notification of this utilization level. Therefore, there is an advantage in that a change in response to the level can be ensured. In addition, the above-mentioned level can be displayed as a current level later on.

At the same time, the utilization level can be

0926482.10704

reused. As a result, it is possible to allow a user to transport or deal in this utilization level when the user purchases a new terminal; and it is also possible to allow another user to purchase the utilization level as an initial value, in other words, to allow the user to utilize the utilization level as intangible property. Therefore, the users have the following advantages: services, which had been received in the past, can be utilized continuously; and a part or a whole of this utilization level can be purchased as an additional service. Moreover, the communication service provider also has advantages in that this utilization level can be set as an additional service charge separated from a basic charge, or as a promotion-campaign product, so that a mutually convenient system can be built.

The dedicated communication terminal may comprise:

a level storing means that is attached so as to be removable from a main body of the dedicated communication terminal, and that stores a utilization level.

If such a configuration is used, the utilization level can be reused. As a result, it is possible to allow a user to transport or deal in this utilization level when the user purchases a new terminal; and it is also possible to allow another user to purchase

the utilization level as an initial value, in other words, to allow the user to utilize the utilization level as intangible property. Therefore, the users have the following advantages: services, which had been received in the past, can be utilized continuously; and this utilization level can be purchased as an additional service. Moreover, the communication service provider also has advantages in that this utilization level can be set as an additional service charge separated from a basic charge, or as a promotion-campaign product, so that a mutually convenient system can be built.

The changing means rearranges, drops, and adds: memory allocation for an additional function; a displaying function; an call incoming notification function; an available function; and quality of communication services.

Such a configuration has an effect of providing the most appropriate service in response to a utilization status of each function for each user.

A communication service system may comprise: a plurality of switching centers; a communication network for connecting the plurality of switching centers with one another; and the above-described dedicated communication terminal for establishing a communication circuit for communicating with each of the switching centers.

Brief Description of Drawings

Fig. 1 is a system configuration diagram illustrating a configuration of a communication service system according to an embodiment 1 of the present invention.

Fig. 2 is a block diagram illustrating a configuration of a mobile unit according to an embodiment 1 of the present invention.

Fig. 3 is a procedure diagram for describing a procedure (W-CDMA method) for establishing a communication circuit in response to a call from a mobile unit by exemplifying a case where a packet communication service is used.

Fig. 4 is an explanatory diagram illustrating a configuration of an empirical value/level control portion according to an embodiment 1 of the present invention, which is arranged according to an information processing procedure.

Fig. 5 is an explanatory diagram illustrating a configuration of an empirical value/level control portion according to an embodiment 2 of the present invention, which is arranged according to an information processing procedure.

Fig. 6 is a block diagram illustrating a configuration of a mobile unit according to an embodiment 3

of the present invention.

Fig. 7 is a block diagram illustrating a configuration of a mobile unit according to an embodiment 4 of the present invention.

Fig. 8 is a block diagram illustrating a configuration of a mobile unit according to an embodiment 5 of the present invention.

#### Best Method for Carrying out the Invention

For the purpose of describing the present invention in further detail, best methods for embodying the invention are described with reference to attached drawings as below.

#### Embodiment 1

Fig. 1 is a system configuration diagram illustrating a configuration of a communication service system according to an embodiment 1 of the present invention. In Fig. 1, each of 1s is a mobile unit (dedicated communication terminal). Each of 2s is a radio base station for transmitting and receiving information by radio to and from each of the mobile units 1. Numerals 3 indicate mobile multimedia switching centers (switching centers) that are mutually connected to constitute a core network of a mobile communication service provider. 4 is a

09026452 110701

subscriber database that is provided in this core network, and that holds information such as contractual coverage of each subscriber who utilizes each of the mobile units 1 described above. 5 is a radio control station that controls overall communication in the plurality of radio base stations 3 using information in the above-mentioned core network, and the like. In this connection, as this radio control station 5, a radio control station using W-CDMA (wideband code division multiple access method), or the like, can be suitably utilized. The W-CDMA can define service classes (classes such as communication speed and band guarantee) in packet communication and the like.

Fig. 2 is a block diagram illustrating a configuration of the mobile unit 1 according to the embodiment 1 of the present invention. In Fig. 2, 6 is an antenna. 7 is a communication control portion for transmitting and receiving communication information in relation to the following services with the radio base station 5 using this antenna 6: voice communication service; data communication service utilized for data communication between the mobile units 1, and the like; packet communication service utilized for connecting to Internet, mail, and the like; and message communication service utilized for message exchange in the mobile communication service provider, and the like. 8 is a



display operation portion that has I/O devices such as LCD (liquid crystal device), a speaker, a microphone, a tone melody output device, and keys for inputting alphanumeric and kana characters, and that presents various kinds of information to a user of this mobile unit 1, and that outputs operation input information done by key operation, and the like, in response to the information. 9 is an external interface portion that outputs external input information, and that has the following external I/O devices: a PC (personal computer) interface for performing data exchange with a personal computer PC; a hands-free interface for performing data exchange, in relation to the voice communication service, with a hands-free set comprising an external speaker and a microphone; a short-distance communication interface for performing data exchange with other telecommunication equipment using Bluetooth, infrared communication, or the like. The received information of the communication control portion 7, the operation input information, and the external input information are basically exchanged among the communication control portion 7, the display operation portion 8, and the external interface portion 9 in response to the utilized service, or the like. In addition, 10 is an additional function portion that has a telephone directory, a calendar, a clock, a schedule, games, and the like, and that performs

those individual functions in response to the operation input information, or the like.

11 is an empirical value/level control portion comprising: an empirical-value counter for individually counting utilized quantity and a frequency for each of the communication services and for each of the portions 7, 8, 9, and 10 described above; an empirical-value computing element (a storing means, a functional counter) for calculating a weighted sum of the plurality of counted values by weight; a level determining unit (a changing means, a level determining means) for determining a level of the weighted sum and for holding the level; and a function determining unit (a changing means) for determining functions of each of the communication services and each of the portions 7, 8, 9, and 10 described above, and for updating the functions, according to this level, or the like.

Next, the operation of the present invention is described.

Fig. 3 is a procedure diagram for describing a procedure for establishing a communication circuit in response to a call from the mobile unit 1 (W-CDMA method) by exemplifying a case where the packet communication service is used. In Fig. 3, T1 is a request timing at which the communication control portion 7 outputs a packet

communication request to the mobile multimedia switching center 3 in response to an input of an information packet from the display operation portion 8 and the external interface portion 9. On this packet communication request, information about, for example, requested quality of service (QoS) for the packet communication service of this mobile unit 1, a level determined by the level determining unit of the empirical value/level control portion 11, and the like, are superposed.

T2 is inquiry timing at which the mobile multimedia switching center 3 requests the subscriber database 4 to output information required to establish a circuit in response to this packet communication request. In addition, T3 is response timing at which the subscriber database 4 outputs the information in response to this inquiry. By the way, as the information required to establish this circuit, there is information such as contractual coverage of the user of the mobile unit 1 described above.

T4 is response timing at which the mobile multimedia switching center 3 determines service quality allocatable to the mobile unit 1, according to the following: information such as the requested quality of service, the level, and the contractual coverage; a utilization status of the radio base station 5; and the



Fig. 4 is an explanatory diagram illustrating a configuration of the empirical value/level control portion 11 according to the embodiment 1 of the present invention, which is arranged according to information processing procedure. In Fig. 4, 12 is an empirical-value counter (a storing means and a functional counter). 13 is an empirical-value computing element (a changing means). 14 is a level determining unit (a changing means and a level determining means). 15 is a function determining unit (a changing means). From 16a to 16n are functional counters for counting the following: utilized quantity and a frequency of a function allocated to each functional counter, for example, a number of times of operation and duration of communication for outgoing and incoming calls, mail transmission and reception, contents access, and the like; and traffic such as data quantity of packet communication. From 17a to 17n are weighted multipliers for multiplying count values, from the functional counters from 16a to 16n respectively, by a weighted count. 18 is an adder for adding multiplication outputs of the plurality of multipliers from 17a to 17n. 19 is an empirical-value range table corresponding to each level. 20 is a setting information table for the portions 7, 8, 9, and 10 corresponding to each level.

Each of the portions 7, 8, 9, and 10 has not

only a part for performing each basic function, but also a memory and a table for holding the above-mentioned settings. In addition, by writing a function set selected from the above-mentioned setting information table 20 to the memory and the table, the function determining unit 15 performs changing processing such as rearrangement, drop, and addition of the following: for example, memory allocation for the additional function; a displaying function; a call incoming notification function; and an available function; and quality class, data communication speed, capacity, and functions, of communication service.

In addition to the above, the function determining unit 15 can perform the following processing: increasing a number of colors allocated to a display-color conversion table for a LCD so as to increase displayable colors; increasing a number of harmonies and a number of melody sounds (lengths) at the time of incoming call; extending a memory size of a telephone directory; extending a range of accessible contents; and changing a background color and a displayed image at the time of waiting for a call (that is to say, a display screen in response to a level). Among other things, changing the appearance of the mobile unit 1 in this manner to distinguish it from those of other consumers (changing appearance of the mobile unit 1 to a state different from the others in this manner) can

improve a level of user's satisfaction. In addition, an antenna or a flip, of which luminous color is different according to a level, a battery pack having a memory (function module), and the like, may be provided separately.

This empirical value/level control portion 11 operates at the following timing: for example, when communication is completed; when power supply is turned off; when each function is completed; or the like. To be more specific, a value of each of the functional counters from 16a to 16n of the empirical-value counter 12 increases only by the used quantity. The weighted multipliers from 17a to 17n multiply the updated counter value by the weighted count. The adder 18 changes only by this new value. The level determining unit 14 compares this added value, which has been changed, with the corresponding empirical-value range table 19, and outputs a level corresponding to the added value. In addition, the function determining unit 15 refers to the setting information table 20, and selects a function set corresponding to the level, and then sets the settings to each of the portions 7, 8, 9, and 10. In this connection, because the level has been output to the mobile multimedia switching center 3 at the time of a circuit establishment request for packet communication, or the like, even if the level is changed in this manner, this switching center 3

side can recognize the level and perform circuit settings in response to the level.

In this manner, determining settings for each function in response to a frequency of utilization, or the like, according to the level permits accumulated utilization information for each mobile unit to be held. In response to the accumulated utilization information, functions, user interfaces, and/or communication services for each of the mobile units 1 can be changed. In each of the mobile units 1, in response to each user's utilization status, the following becomes possible: extension of the functions; a change in the user interfaces; and furthermore, changes in communication speed and quality allocation for the functions. In other words, the more frequently the mobile unit 1 is utilized, the higher service can be provided. Moreover, by suitably setting a growth curve of this level, the user enjoys the improvement of the services as if he or she is playing a game. As a result, utilization can be promoted.

In particular, functional counters from 16a to 16n are provided for each function, and a utilization level is determined according to the total utilization status. Therefore, in each of the mobile units 1, for the purpose of providing easier utilization of functions and communication services, which are especially frequently



utilized, it is possible to perform the following in response to each user's utilization status: extension of the functions; a change in resource allocation; a change in user interfaces; and furthermore, changes in service classes including communication speed and quality of the functions.

As a result, the mobile communication service provider can meet all kinds of user's demands from beginners to highly sophisticated users while meeting various kinds of service demands in recent years. What is more, the users can obtain not only real but also psychological satisfaction. By extension, an effect of promoting sounder development of the communication industry is produced. Moreover, it is not necessary for a manufacturer, which has supplied those mobile units 1 and the like according to specifications of this mobile communication service provider, to design a mobile unit by taking a balance between multiple functions with high performance and optimization of limited resources such as a memory (allocation for each function) into consideration as a result of assuming that users utilize all functions equally. Therefore, loads put on and efforts exerted by the manufacturer can also be reduced.

Moreover, limiting and restricting the functions of the mobile unit 1 at first allows each user to

have a time period over which the user becomes accustomed to new services and new functions using fixed simple interfaces. Therefore, there is also an advantage in that the user can be trained effectively when the user is provided with new advanced services such as W-CDMA.

By the way, this embodiment 1 has the configuration in which the holding function and the changing function are provided on the side of the mobile unit 1. However, if a level is only determined according to each service type for example, the level may be determined in the radio control station 5, the mobile multimedia switching center 3, or the like; and after that, the level may be held in the subscriber database 4. Additionally, the information may also be held in the mobile unit 1 and the subscriber database 4 by distributing the information appropriately between the two.

#### Embodiment 2

Fig. 5 is an explanatory diagram illustrating a configuration of the empirical value/level control portion 11 according to an embodiment 2 of the present invention, which is arranged according to an information processing procedure. In Fig. 5, from 21(1) to 21(1) are setting-by-category portions, each of which is provided for each category of communication services including voice

communication service, data communication service, packet communication service, and message communication service, and each of which has the empirical-value computing element 13, the level determining unit 14, and the function determining unit 15. In addition, the empirical-value counter 12 is provided with the functional counters from 16a to 16n. Each of the categories has an associated set of the functional counters 16a, ..., 16n.

Each of the setting-by-category portions from 21 (1) to 21 (1) determines a level by referring to count values of the functional counters from 16a to 16n, which should be taken into consideration, at the time when utilization of each function is finished, or the like. After that, each of the setting-by-category portions makes settings for each of the portions 7, 8, 9, and 10 in response to the level. Configuration and operation other than those described above are similar to the embodiment 1. Therefore, additional description is omitted.

As described above, according to this embodiment 2, the functional counters from 16a to 16n are provided for respective functions so as to make the level of utilization of each communication service available to the portions 21(1)-21(1). Utilization level is individually determined in response to a utilization status for each function. Therefore, it is possible to perform the

following: extension of the functions; a change in resource allocation; a change in user interfaces; and furthermore, changes in service classes including communication speed and quality for the functions in each of the mobile units 1, in response to each user's utilization status of each category, for the purpose of providing easier utilization of functions and communication services, which are especially frequently utilized. As a result, the mobile unit 1 is more adapted for utilized functions so that the user is provided with the mobile unit 1 that can be used more easily. Moreover, a level of satisfaction also increases. Furthermore, mapping of the services and the functions with the levels can also be performed easily by changing the weighted count, which permits an arbitrary growth curve to be set easily.

### Embodiment 3

Fig. 6 is a block diagram illustrating a configuration of the mobile unit 1 according to an embodiment 3 of the present invention. In Fig. 6, 22 is a main body housing of the mobile unit 1. 23 is a removable empirical value/level control portion that is attached to this main body housing 22 so as to be removable, and that has the empirical-value counter 12, the empirical-value computing element 13, the level determining unit 14, and

the function determining unit 15. 24 is an empirical value/level interface portion (a level input/output means) that operates this removable empirical value/level control portion 23, and that establishes an information exchange channel between this removable empirical value/level control portion 23 and each of the other portions 7, 8, 9, and 10, at the following timing: for example, when communication is completed; when power supply is turned off; when each function is completed; or the like. A configuration and each of the portions other than those described above are similar to the embodiment 2. Therefore, additional description is omitted.

If such a configuration is used, when purchasing a new terminal or the like, a utilization level can be reused by simply attaching this removable empirical value/level control portion 23 to a new mobile unit at that time. Moreover, separately supplying the removable empirical value/level control portion 23, in which a utilization level is written beforehand, provides the user with the mobile unit 1 that meets user's requests, and that is suitable for a user's level. This is another effect produced by this configuration.

#### Embodiment 4

Fig. 7 is a block diagram illustrating a



In particular, because the level can be read and written through the communication control portion 7, it is possible to notify a communication service provider of the utilization level by voice, music, and display when the level is changed; and it is also possible to extend various kinds of services by utilizing the reported level. For example, the following become possible: from the radio control station 5, the mobile multimedia switching center 3, or the like, in response to a notification of this utilization level, downloading software in relation to newly available additional functions and communication speed, and the like, automatically or arbitrarily; downloading additional function software automatically and arbitrarily; in the radio control station 5, the mobile multimedia switching center 3, or the like, setting a promotion-campaign product (a bonus-level give-away, and a give-away in response to a level, and the like); and in response to user's utilization status, extending various kinds of additional services including discount service in response to a notified level, various kinds of message transmission services, empirical value ranking service, and give-away service and cash-back service by point conversion of a level (electronic money service). Therefore, effective services can also be extended on the communication service provider side. Accordingly, high-





an effect of controlling an increase in a hardware scale to a required minimum, while providing a high level of service by setting functional setting stages in detail.

#### Industrial Applicability

As described above, the communication service system according to the present invention holds accumulated utilization information for each dedicated communication terminal, and changes functions, user interfaces, and/or communication services, for each of the dedicated communication terminals, in response to the accumulated utilization information. Therefore, optimization of services can be achieved for each of the dedicated communication terminals in response to each user's utilization status. For this reason, the communication service system according to the present invention is suitable for communication services, which use a next-generation wideband communication circuit, and the like.

## CLAIMS

1. A communication service system comprising:  
a plurality of switching centers;  
a communication network for connecting the plurality of switching centers with one another; and  
a dedicated communication terminal for establishing a communication circuit for communicating with each of the switching centers;

wherein said communication service system holds accumulated utilization information for each of the dedicated communication terminals, and changes functions, user interfaces, and/or communication services, for each of the dedicated communication terminals, in response to the accumulated utilization information.

2. A dedicated communication terminal that establishes a communication circuit for communicating with respective switching centers connected with one another through a communication network, and that performs prescribed communication, said dedicated communication terminal comprising:

a storing means for holding accumulated utilization information of the dedicated communication terminal itself; and

a changing means for changing functions, user interfaces, and/or communication services, for the dedicated communication terminal, in response to the accumulated utilization information.

3. A dedicated communication terminal that establishes a communication circuit for communicating with respective switching centers connected with one another through a communication network, and that performs prescribed communication, said dedicated communication terminal comprising:

a plurality of functional counters for counting accumulated utilization information of each function, and for holding the accumulated utilization information;

a level determining means for calculating a weighted sum of values of the plurality of functional counters, and for determining a utilization level of the dedicated communication terminal according to the sum of the values; and

a changing means for changing functions, user interfaces, and/or communication services in response to said utilization level.

4. A dedicated communication terminal according to Claim 3, comprising:

a level storing means for storing a utilization level; and

a resetting means for resetting count values of the plurality of functional counters when the utilization level increases.

5. A dedicated communication terminal according to Claim 3, wherein the functional counter is provided for each category of communication services to count traffic in each of the communication services.

6. A dedicated communication terminal according to Claim 3, comprising:

a level storing means for storing a utilization level; and

a level input/output means for reading/writing a utilization level from and to said level storing means.

7. A dedicated communication terminal according to Claim 3, comprising:

a level storing means that is attached so as to be removable from a main body of the dedicated communication terminal, and that stores a utilization level.

8. A dedicated communication terminal



said utilization level;

wherein each of the switching centers allocates  
a circuit in response to the level that has been  
transmitted from the dedicated communication terminal.


0955452-110701

# ABSTRACT


In a communication service system, it is possible to hold accumulated utilization information for each of dedicated communication terminals, and to change functions, user interfaces, and/or communication services, for each of the dedicated communication terminals, in response to the accumulated utilization information. This enables optimization of services for each of the dedicated communication terminals in response to each user's utilization status.

20250521 10:04

FIG. 1

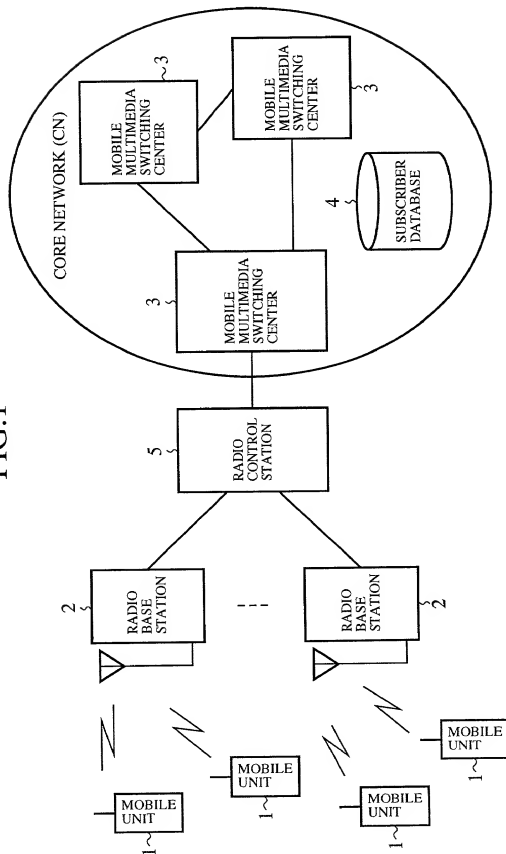



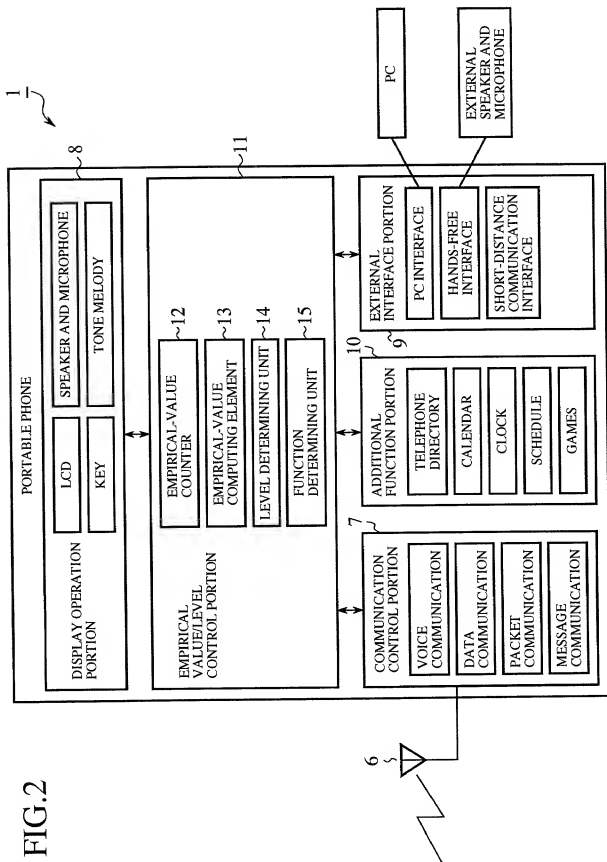

3/8

FIG.3



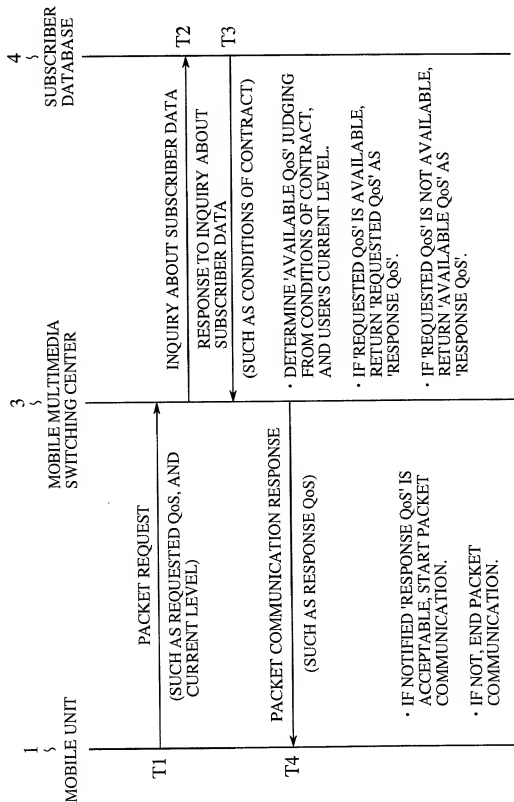


FIG. 4

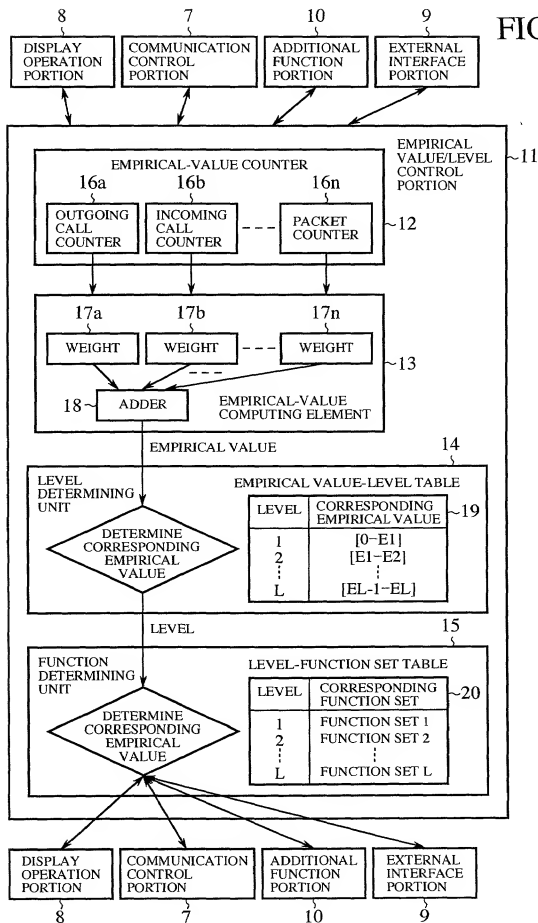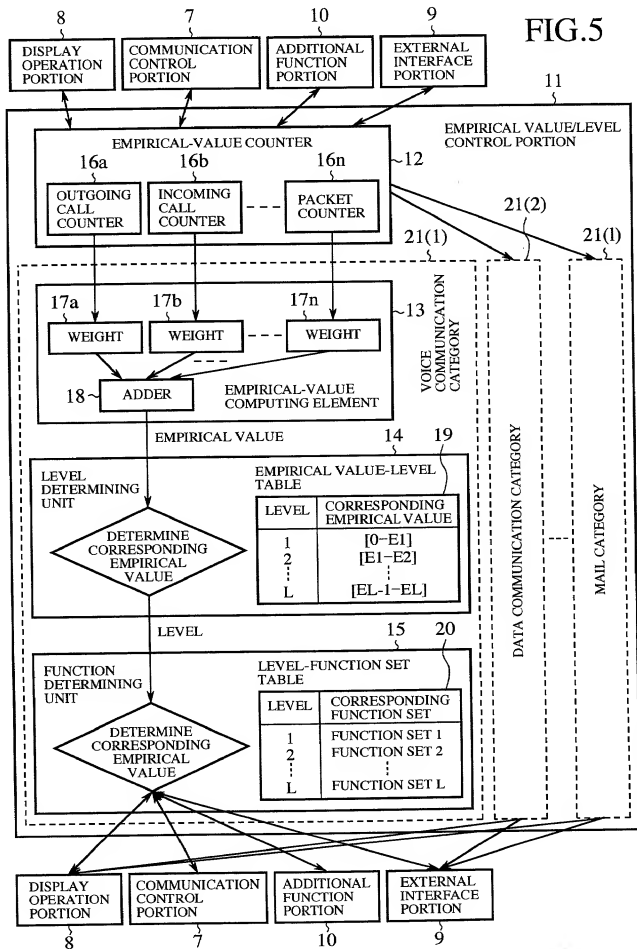

0926462-10701

FIG. 5





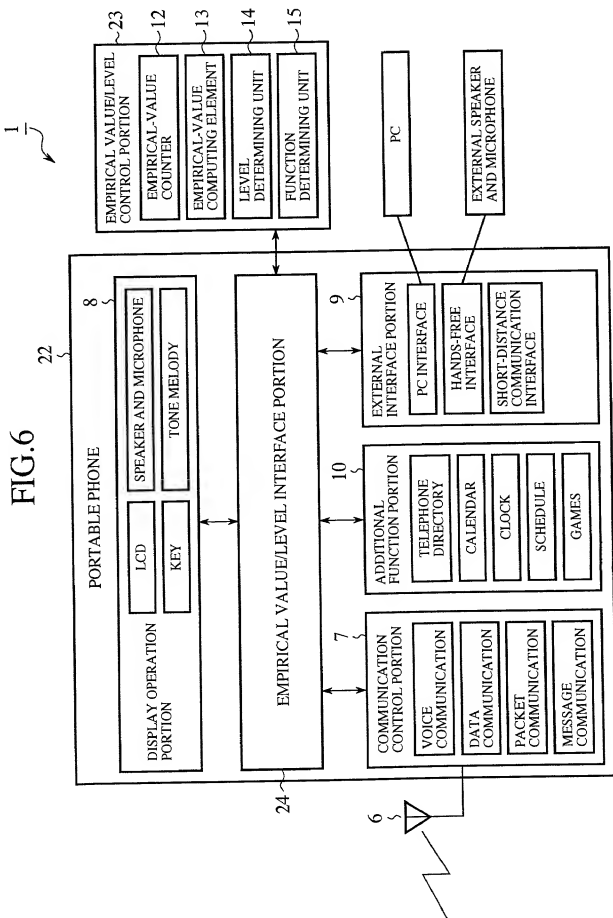


FIG. 7

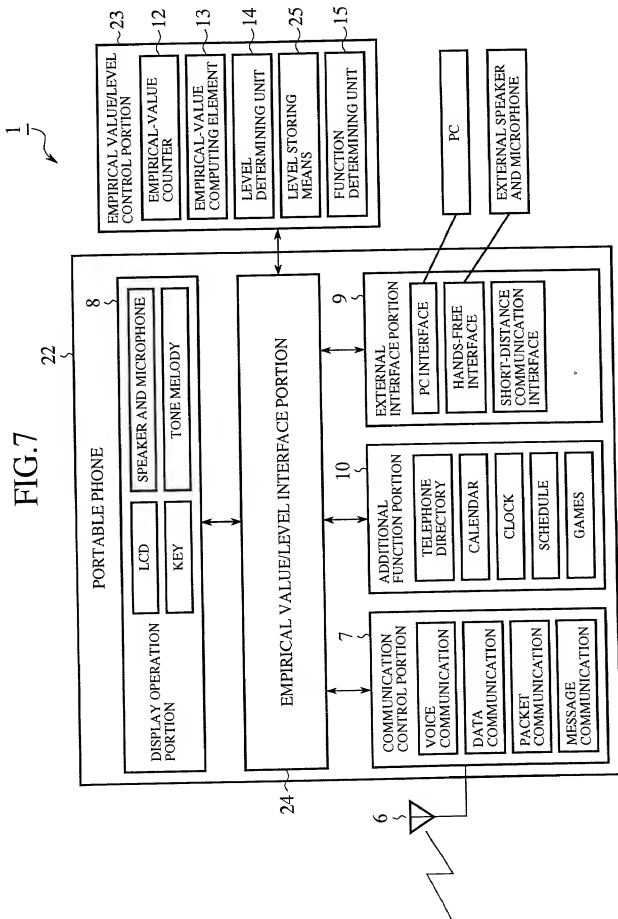

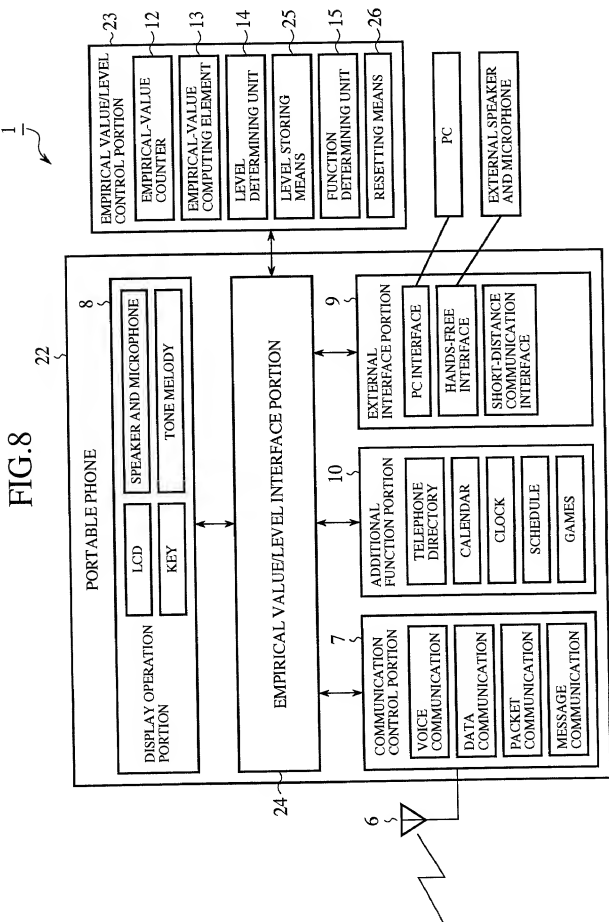

We (I) hereby claim the benefit under Title 35, United States Code, § 119(e) of any United States provisional application(s) listed below.

(Application Number)	(Filing Date)
(Application Number)	(Filing Date)

We (I) hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s), or § 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR § 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application.

Application Serial No.	Filing Date	Status (pending, patented, abandoned)
_____	_____	_____
_____	_____	_____
_____	_____	_____

And we (I) hereby appoint: Norman F. Oblon, Reg. No. 24,618; Marvin J. Spivak, Reg. No. 24,913; C. Irvin McClelland, Reg. No. 21,124; Gregory J. Maier, Reg. No. 25,599; Arthur I. Neustadt, Reg. No. 24,854; Richard D. Kelly, Reg. No. 27,757; James D. Hamilton, Reg. No. 28,421; Eckhard H. Kuesters, Reg. No. 28,870; Robert T. Pous, Reg. No. 29,099; Charles L. Gholz, Reg. No. 26,395; William E. Beaumont, Reg. No. 30,996; Jean-Paul Lavallée, Reg. No. 31,451; Stephen G. Baxter, Reg. No. 32,884; Richard L. Treanor, Reg. No. 36,379; Steven P. Weihrouch, Reg. No. 32,829; John T. Goolkasian, Reg. No. 26,142; Richard L. Chinn, Reg. No. 34,305; Steven E. Lipman, Reg. No. 30,011; Carl E. Schlier, Reg. No. 34,426; James J. Kulbaski, Reg. No. 34,648; Richard A. Neifeld, Reg. No. 35,299; J. Derek Mason, Reg. No. 35,270; Surinder Sachar, Reg. No. 34,423; Christina M. Gadiano, Reg. No. 37,628; Jeffrey B. McIntyre, Reg. No. 36,867; William T. Enos, Reg. No. 33,128; Michael E. McCabe, Jr., Reg. No. 37,182; Bradley D. Lytle, Reg. No. 40,073; and Michael R. Casey, Reg. No. 40,294; our (my) attorneys, with full powers of substitution and revocation, to prosecute this application and to transact all business in the Patent Office connected therewith; and we (I) hereby request that all correspondence regarding this application be sent to the firm of OBLON, SPIVAK, McCLELLAND, MAIER & NEUSTADT, P.C., whose Post Office Address is: Fourth Floor, 1755 Jefferson Davis Highway, Arlington, Virginia 22202.

We (I) declare that all statements made herein of our (my) own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

100 Hiroshi MATSUYAMA  
NAME OF FIRST SOLE INVENTOR

Residence: Tokyo, Japan

Hiroshi Matsuyama  
Signature of Inventor

Citizen of: Japan

Post Office Address: c/o MITSUBISHI DENKI

KABUSHIKI KAISHA, 2-3, Marunouchi  
2-chome, Chiyoda-ku, Tokyo 100-8310 Japan

September 19, 2001  
Date

JFY 1/00



# Declaration, Power Of Attorney and Petition

Page 1 of 3 2

WE (I) the undersigned inventor(s), hereby declare(s) that:

My residence, post office address and citizenship are as stated below next to my name,

We (I) believe that we are (I am) the original, first, and joint (sole) inventor(s) of the subject matter which is claimed and for which a patent is sought on the invention entitled

"COMMUNICATION SERVICE SYSTEM, AND DEDICATED COMMUNICATION TERMINAL USED

FOR THE SAME"

the specification of which

☐ is attached hereto.

☐ was filed on \_\_\_\_\_ as

Application Serial No. \_\_\_\_\_

and amended on \_\_\_\_\_.

☒ was filed as PCT international application

Number PCT/JP00/01405

on March 8, 2000,

and was amended under PCT Article 19

on \_\_\_\_\_ (if applicable).

We (I) hereby state that we (I) have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

We (I) acknowledge the duty to disclose information known to be material to the patentability of this application as defined in Section 1.56 of Title 37 Code of Federal Regulations.

We (I) hereby claim foreign priority benefits under 35 U.S.C. § 119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed. Prior Foreign Application(s)

Application No.	Country	Day/Month/Year	Priority Claimed
_____	_____	_____	<input type="checkbox"/> Yes <input type="checkbox"/> No
_____	_____	_____	<input type="checkbox"/> Yes <input type="checkbox"/> No
_____	_____	_____	<input type="checkbox"/> Yes <input type="checkbox"/> No
_____	_____	_____	<input type="checkbox"/> Yes <input type="checkbox"/> No